



UL5085 approved three-phase transformers isolation - control

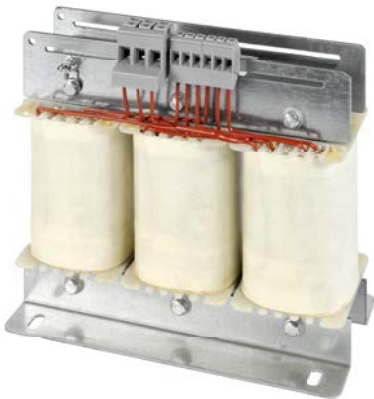

Power: 1000 ÷ 23000 VA
Input voltage: 100 ÷ 600 VAC
Secondary circuit output voltage: 100 ÷ 600 VAC

Technical data
Duty cycle: continuous
Frequency: 50/60 Hz
Protection rating: IP 00
Terminal block protection rating: IP 20
Ambient temperature: +40°C MAX
Thermal insulation class: F/155°C
Protection against direct and indirect contact: class I
Winding material: copper
Standards: EN61558-2-2 EN61558-2-4 CSA C22.2 N.66 UL5085
Approvals: cURus file E364320 - EAC



Three-phase transformers for control and isolation circuits.
The insulation between the primary and secondary windings is always double and reinforced.
TTUL series units for general use are manufactured on demand for the American market.

Optional accessories: Terminal boards with fuse-holder, protection thermal switches, electrostatic shield

Code	Power (VA)	Length L (mm)	Depth P (mm)	Height H (mm)	Fixing		Weight (Kg)
					X	Y	
TTUL10BXX	1000	180	135	180	150	105	14,5
TTUL15BXX	1500	240	120	230	200	95	21
TTUL16BXX	1600	240	120	230	200	95	21
TTUL20BXX	2000	240	130	230	200	105	25
TTUL25BXX	2500	240	145	230	200	120	30
TTUL30BXX	3000	300	160	290	250	112	36
TTUL35BXX	3500	300	160	290	250	112	36
TTUL40BXX	4000	300	170	290	250	122	45
TTUL50BXX	5000	300	180	290	250	132	53
TTUL55BXX	5500	300	180	290	250	132	53
TTUL60BXX	6000	300	180	290	250	132	53
TTUL65BXX	6500	300	190	290	250	142	54
TTUL70BXX	7000	300	190	290	250	142	54
TTUL75BXX	7500	300	190	290	250	142	54
TTUL80BXX	8000	360	170	340	325	134	75
TTUL10CX	10000	360	190	340	325	154	83
TTUL12CX	12000	420	240	420	375	150	110
TTUL15CX	15000	420	250	420	375	160	120
TTUL18CX	18000	420	260	420	375	170	140
TTUL20CX	20000	480	310	480	423	185	170
TTUL23CX	23000	480	320	480	423	195	190
TTUL25CX	25000	480	320	480	423	195	190
TTUL30CX	30000	480	330	480	423	205	200
TTUL35CX	35000	480	330	480	423	205	220
TTUL40CX	40000	480	350	480	423	215	230
TTUL45CX	45000	480	350	480	423	215	235
TTUL50CX	50000	600	350	600	550	210	280
TTUL55CX	55000	600	350	600	560	220	300
TTUL60CX	60000	600	360	600	560	230	340
TTUL65CX	65000	600	370	600	560	240	380
TTUL70CX	70000	600	380	600	560	250	400