




DATE	REV.	DESCRIPTION	NAME
13.10.2014	01	On the connector housing must be changed the silk print and the ATEX logo. On the label of the plastic bag must be changed the silk print and the ATEX logo. See the drawing	LORENZO CIMINO
24.07.2017	02	On the connector housing must be changed the silk print and the ATEX logo. On the label of the plastic bag must be changed the silk print and the ATEX logo. See the drawing	ROBERTO SUGLIANI
07.08.2018	03	On the ATEX label and on the operating instructions must be added MADE IN CHINA.	ROBERTO SUGLIANI

- C 1
- C 2
- C 3
- C 4
- C 5

A	PRESS CABLE SREW
B	LAMELLAE PRESS-CABLE SEAL
C	GAKET PRESS-CABLE SEAL
D	HOUSING BLACK
E	SCREW CONTACT GOLD PLATED
F	O-RING
G	INTERNAL CORE M12 A-CODED
H	O-RING
I	PLASTIC NUT FOR HOUSING
J	M12 NUT Brass+nickel plated (CuZnNi)

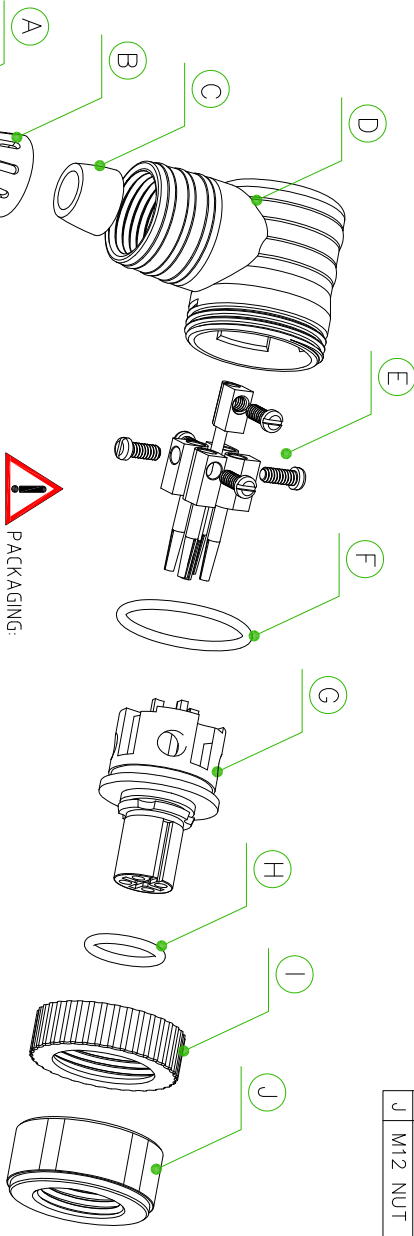

PACKAGING:
SINGLY PACKED IN THE PLASTIC BAG
IN THE PLASTIC BAG MUST BE INSERTED THE
NEW OPERATING INSTRUCTION FOR CIRCULAR CONNECTORS.

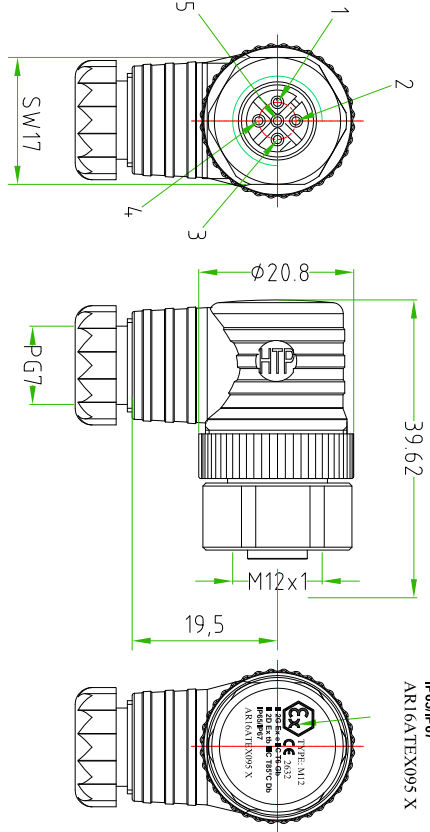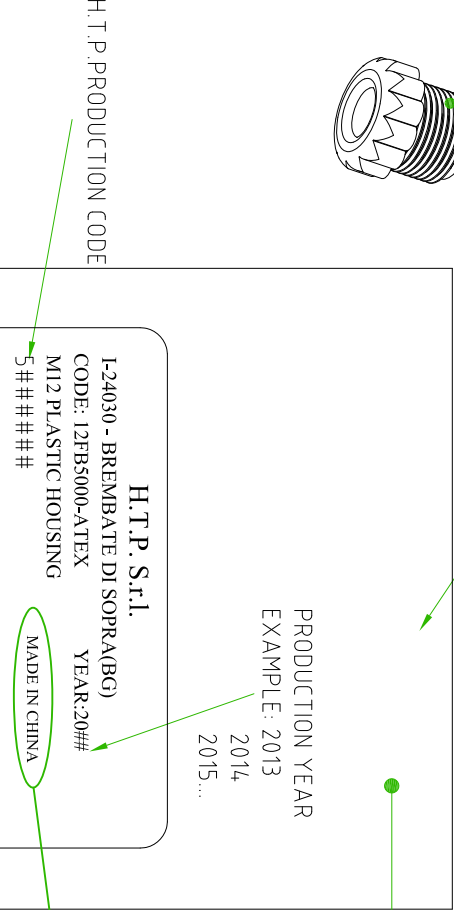


CONNECTOR FEATURES	
PRODUCT TYPE	M12 A-CODED FIELD ATTACHABLE
CONTACT TYPE	FEMALE
NUMBER OF CONTACTS	5POLES
HOUSING TYPE	90°
EXIT CABLE	PG7
RATED VOLTAGE	60V AC/DC
RATED CURRENT	4A
COUPLING NUT MATERIAL	Brass+nickel plated (CuZnNi)
HOUSING MATERIAL	PA66 - CM3004V0
INTERNAL CORE MATERIAL	PA66 - CM3004V0
O-RING	NBR
PROTECTION CLASS	IP65/IP67
CONNECTOR WITH H.T.P. LOGO	



THIS CODE IS SPECIAL BECAUSE IS THE ATEX
CONNECTORS MAIN REFERENCE NORM.ATEX2014/34/EU
MATERIAL PA66 - CM3004V0 (Material:V0 UL/CSA), FOR
ALL COMPONENT OF THE CONNECTOR

PAY ATTENTION: REV. 02

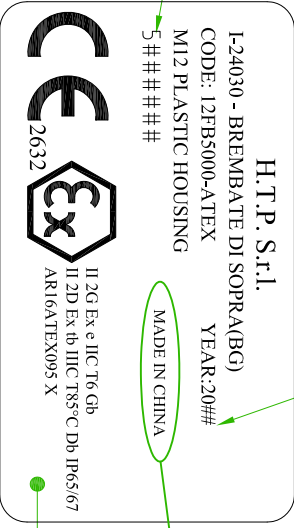

TOLLERANZE	±0.2	DISEGNATORE	DATA	SCALA	DISEGNO
UDM	ANGLO	LORENZO CIMINO	23.05.14	1:1	1/2
DESCRIZIONE	M12 FEMALE ANGLED 90° 5POLES, FIELD ATTACHABLE CONNECTOR MAIN REFERENCE NORM ATEX2014/34/EU		TRPO	M12	MATERIALE
H.T.P. S.r.l.		H.T.P. S.r.l.		CODE	
HIGH TECH PRODUCTS		HIGH TECH PRODUCTS		12FB5000-ATEX	

