

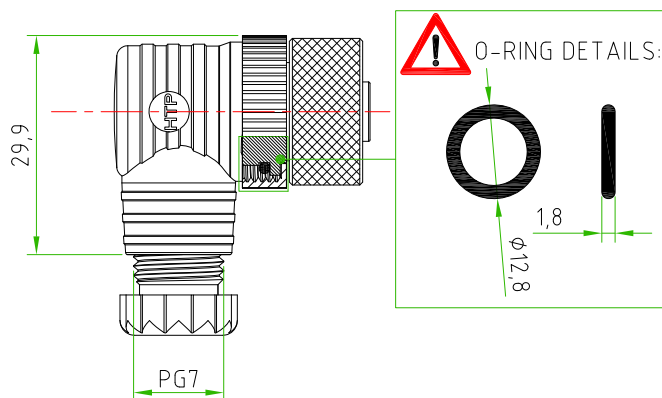



Rev.	Modify	Date	Signed	Approved

Rev.	Modify	Date	Signed	Approved

Rev.	Modify	Date	Signed	Approved

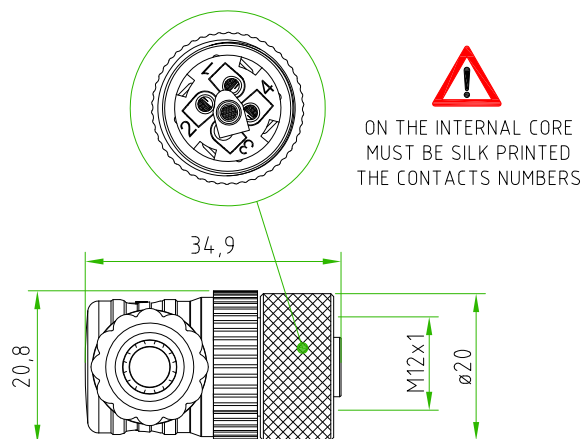

CONNECTOR FEATURES	PRODUCT TYPE	M12 CIRCULAR CONNECTOR FIELD ATTACHABLE
	CONNECTOR TYPE	FIELD ATTACHABLE 90°
	HOUSING MATERIAL/COLOUR	PA66+30%GF/BLACK
	PRESS-CABLE MATERIAL/COLOUR	PA66/BLACK
	INTERNAL CORE MATERIAL/COLOUR	PA66/BLACK
	M12 COUPLING NUT MATERIAL	BRASS + NICKEL PLATED
	CONTACTS TYPE	FEMALE SCREW CONTACTS
	NUMBER OF POLES	5POLES
	CABLE EXIT	PG7
	SUITABLE CABLE	FROM ø3,5mm TO ø6mm
	MAX.CONDUCTOR SIZE	0,75mm ² (AWG18)
	PROTECTION CLASS	IP67
	RATED VOLTAGE	60V AC/DC
	RATED CURRENT	4A
	CONNECTOR TEMPERATURE RANGE	from -40°C to +90°C
CONNECTOR WITH H.T.P. LOGO		
 PACKAGING: SINGLY PACKED IN THE PLASTIC BAG (PLASTIC BAG WITHOUT ANY LOGO AND LABEL)		

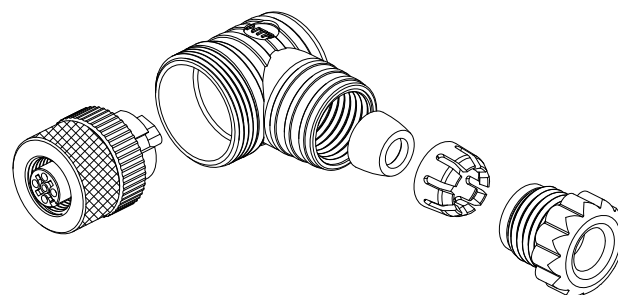

CUSTOMER APPROVAL

SIGNATURE

DATE

PLEASE SIGN
AND RETURN

Designer	SUGLIANI R.	Date	2019-10-21	Tolerance	±0.3	Units:	mm	Series	M12	Drawing n. 1-1
Approved	CIMMINO L.	Date	2019-10-21	Scale	1:1	Size:	A4	Customer code:		



DESCRIPTION

CIRCULAR CONNECTOR M12 FIELD ATTACHABLE, MALE, ANGLED 90°, 5POLES, EXIT CABLE FROM ø3,5mm TO ø6mm
CONNECTOR WITH H.T.P.LOGO

H.T.P.PART NUMBER

12FB5000

