


- 1
2
3
4

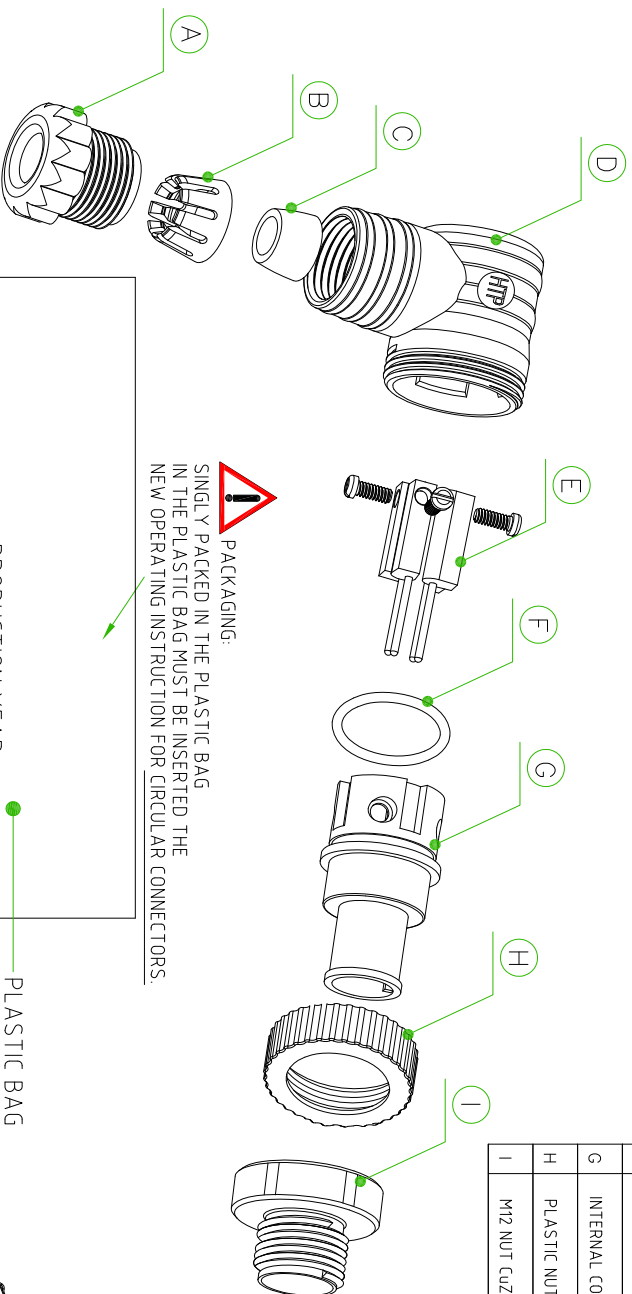


A	PRESS CABLE SREW
B	LAMELLAE PRESS-CABLE SEAL
C	GASKET PRESS-CABLE SEAL
D	HOUSING BLACK
E	SCREW CONTACT GOLD PLATED
F	O-RING
G	INTERNAL CORE M12 A-CODED
H	PLASTIC NUT FOR HOUSING
I	M12 NUT CUZNNI

CONNECTOR FEATURES	
PRODUCT TYPE	M12 A-CODED FIELD ATTACHABLE
CONTACT TYPE	MALE
NUMBER OF CONTACTS	SPOLES
HOUSING TYPE	90°
EXIT CABLE	PG7
RATED VOLTAGE	250V AC/DC
RATED CURRENT	4A
COUPLING NUT MATERIAL	Brass+nickel plated (CuZnNi)
HOUSING MATERIAL	PA66 - 3004G30 (30%GF)
INTERNAL CORE MATERIAL	PA66 - CM3004-V0
PRESS CABLE MATERIAL	PA66 - CM3004-V0
O-RING	NBR
PROTECTION CLASS	IP65/IP67
CONNECTOR WITH H.T.P LOGO	

THIS CODE IS SPECIAL BECAUSE IS THE ATEX CONNECTORS MAIN REFERENCE NORMA:TEX2014/34/EU MATERIAL PA66 - CM3004-V0 (Material:V0 UL/CSA), FOR ALL COMPONENT OF THE CONNECTOR

PAY ATTENTION:

TYPE: M12
II 2G Ex eb IIC T5 Gb
II 2D Ex tb IIIC T100°C Db
IP65/67
TÜV IT20ATEX037X

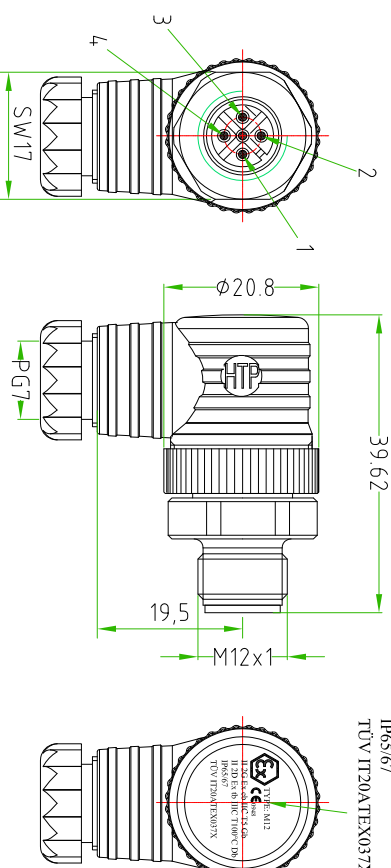

H.T.P. S.r.l.
I-24030 - BREMBATE DI SOPRA(BG)
CODE: M12 PLASTIC HOUSING
YEAR:20##
5#####
MAX VOLTAGE: 60V AC/DC
MAX CURRENT: 2A
MADE IN CHINA
II 2G Ex eb IIC T5 Gb
II 2D Ex tb IIIC T100°C Db
IP65/67
TÜV IT20ATEX037X

WHITE LABEL

TOLLERANZE	±0.2	DISEGNATORE	LORENZO CHINNO	DATA	18.10.2021	SCALE	1:1	DISEGNO	1/2
UDM	ANGOLO	CONTROLLATO	ROBERTO SIGLIANI						
M12 MALE ANGLED 90° 4POLES, FIELD ATTACHABLE E PG7									
CONNECTOR MAIN REFERENCE NORMA:TEX2014/34/EU									
H.T.P. HIGH TECH PRODUCTS								12MB4000-ATEX	

