



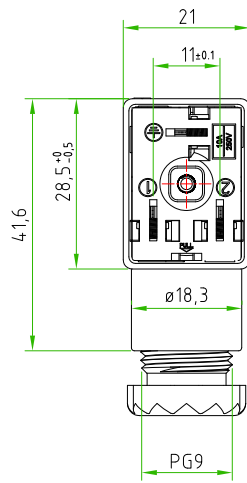




Rev.	Modify	Date	Firma	Approved

Rev.	Modify	Date	Firma	Approved

Rev.	Modify	Date	Signed	Approved

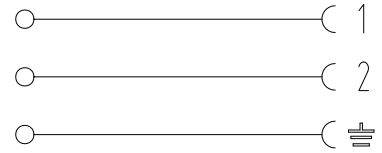

CONNECTOR FEATURES	PRODUCT TYPE	INDUSTRIAL STANDARD FORM B FIELD ATTACHABLE.
	HOUSING MATERIAL/COLOUR	PA66 /BLACK
	PRESS-CABLE MATERIAL/COLOUR	PA66 /BLACK
	INTRINAL CORE MATERIAL/COLOUR	PA66 /BLACK
	HEIGHT HOUSING	30mm
	CONTACTS SPACING	11mm
	CONTACTS TYPE	SCREW CONTACTS(with protection plate)
	NUMBER OF POLES	2POLES+EARTH
	EARTH POSITIONING	H.12 (TURNABLE)
	CABLE EXIT	PG9 UNIFIED
	SUITABLE CABLE	FROM ø6mm TO ø8mm
	MAX.CONDUCTOR SIZE	1,5mm ²
	PROTECTION CLASS	IP67
	CIRCUIT TYPE	WITHOUT ELECTRONIC
RATED VOLTAGE	250V AC/300V DC	
CONNECTOR TEMPERATURE RANGE	from -40°C to +90°C	
GASKET TYPE	PROFILED NBR	
FIXING SCREW	M3X0,5 L=32,5mm	
CONNECTOR WITH H.T.P. LOGO		

CUSTOMER APPROVAL	
SIGNATURE	DATE
PLEASE SIGN AND RETURN	

Designer	SUGLIANI R.	Date	2016-08-05	Tolerance	±0,2	Units:	mm	Series	INDUSTRIAL STANDARD (form B)	Drawing n. 1/1
Approved	CIMMINO L.	Date	2016-08-05	Scale	1:1	Size:	A4	Customer code:		

DESCRIPTION
 RECTANGULAR CONNECTOR INDUSTRIAL STANDARD FORM B, FIELD ATTACHABLE.
 2P.+PE, WITHOUT ELECTRONIC, 250V AC/300V DC, BLACK HOUSING, PG9.
 CONNECTOR WITH H.T.P. LOGO.

H.T.P.PART NUMBER
 M1NS2000

