

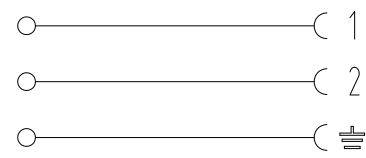



Rev.	Modify	Date	Signed	Approved
Rev.	Modify	Date	Firma	Approved
Rev.	Modify	Date	Firma	Approved

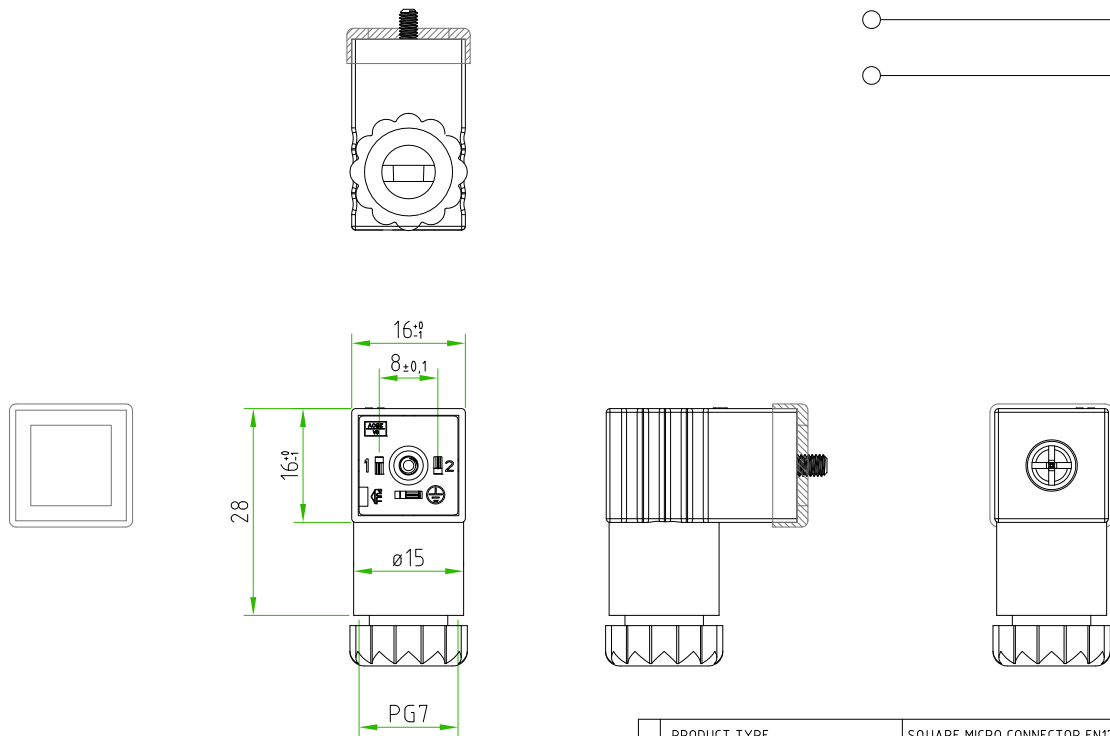

CONTACTS WITHOUT SOLDER ZONE

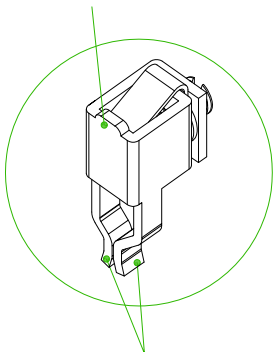


SPRING CONTACTS



CONNECTOR FEATURES	PRODUCT TYPE	SQUARE MICRO CONNECTOR EN175301-803 FORM C FIELD ATTACHABLE.
	HOUSING MATERIAL/COLOUR	PA66 /BLACK
	PRESS-CABLE MATERIAL/COLOUR	PA66 /BLACK
	INTERNAL CORE MATERIAL/COLOUR	PA66 /BLACK
	HEIGHT HOUSING	26mm
	CONTACTS SPACING	8mm
	CONTACTS TYPE	SCREW CONTACTS(with protection plate)
	NUMBER OF POLES	2POLES+EARTH
	EARTH POSITIONING	H.6 (TURNABLE)
	CABLE EXIT	PG7
	SUITABLE CABLE	FROM ø3,5mm TO ø6mm
	MAX.CONDUCTOR SIZE	0,75mm ²
	PROTECTION CLASS	IP67
	CIRCUIT TYPE	WITHOUT ELECTRONIC
	RATED VOLTAGE	250V AC / 300V DC
	CONNECTOR TEMPERATURE RANGE	from -40°C to +90°C
	GASKET TYPE	PROFILED NBR
FIXING SCREW	M2.5X0.5 L=28mm	
CONNECTOR WITH H.T.P. LOGO		

CUSTOMER APPROVAL	
SIGNATURE	DATE
PLEASE SIGN AND RETURN	

Designer	SUGLIANI R.	Date	2018-06-05	Tolerance	±0,3	Units:	mm	Series	EN175301-803 (form C)	Drawing n. 1/1
Approved	CIMMINO L.	Date	2018-06-05	Scale	1:1	Size:	A4	Customer code:		



DESCRIPTION
 SQUARE MICRO CONNECTOR EN175301-803 (form C), FIELD ATTACHABLE, 2P.+PE, WITHOUT ELECTRONIC, 250V AC/300V DC, BLACK HOUSING, PG7. CONNECTOR WITH H.T.P. LOGO.

H.T.P.PART NUMBER
 P1NZ2000